


# RX Series

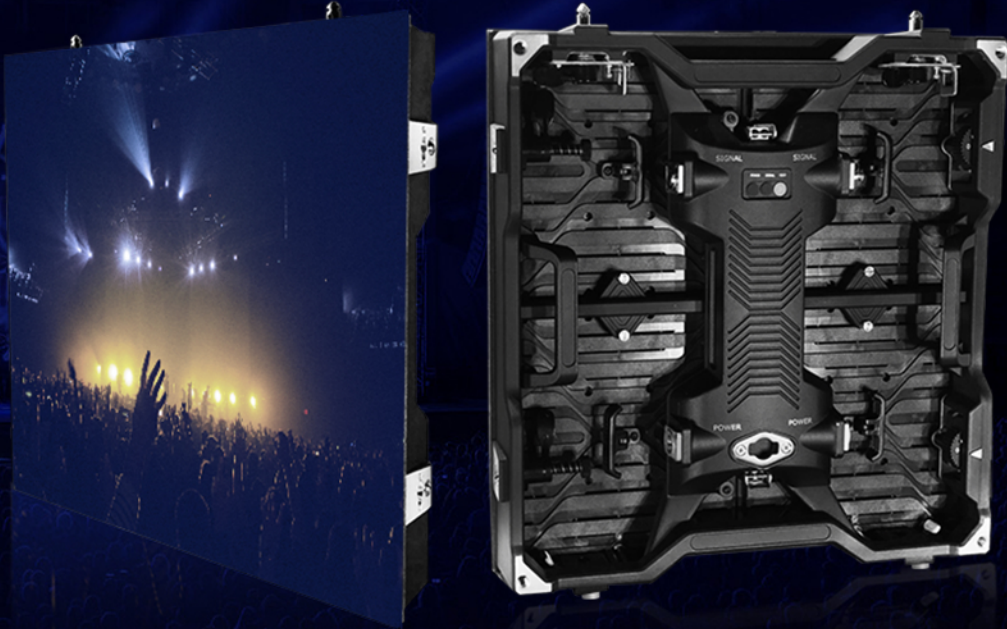

## Part number

## RX2.5/2.6

## RX2/3

## RX(O)3/4

Pixel pitch	2.5/2.6mm	2.8/3.9mm	3.9/4.8mm
LED type	SMD2020(Black)	SMD2020(Black)	SMD1921(Black/White)
Size of module	250mmx250mm	250mmx250mm	250mmx250mm
Resolution of module	100x100/96x96	88x88/64x64	64x64/52x52
Density( dots/m <sup>2</sup> )	160000/147456	123904/65536	65536/43264
Cabinet material	Alu	Alu	Alu
Size of cabinet	500mmx500mm	500mmx500mm	500mmx500mm
Weight of cabinet	7.8kg	7.8kg	8.5kg
Support hanging or not	Yes	Yes	Yes
Support curve or not	Yes	Yes	Yes
Max power consumption	700W/m <sup>2</sup>	600W/m <sup>2</sup>	760W/m <sup>2</sup>
Average power consumption	233W/m <sup>2</sup>	200W/m <sup>2</sup>	253W/m <sup>2</sup>
Colors	16.7M	16.7M	16.7M
Gray scale	16Bits	16Bits	16Bits
Driving method	1/25, 1/24 scanning	1/22, 1/16 scanning	1/16, 1/9 scanning
Refresh frequency	>3000Hz	>3000Hz	>3000Hz
Brightness	800cd/m <sup>2</sup>	800-1000cd/m <sup>2</sup>	3500/5000cd/m <sup>2</sup>
IP grade	IP30	IP30	IP65