


# KB Series

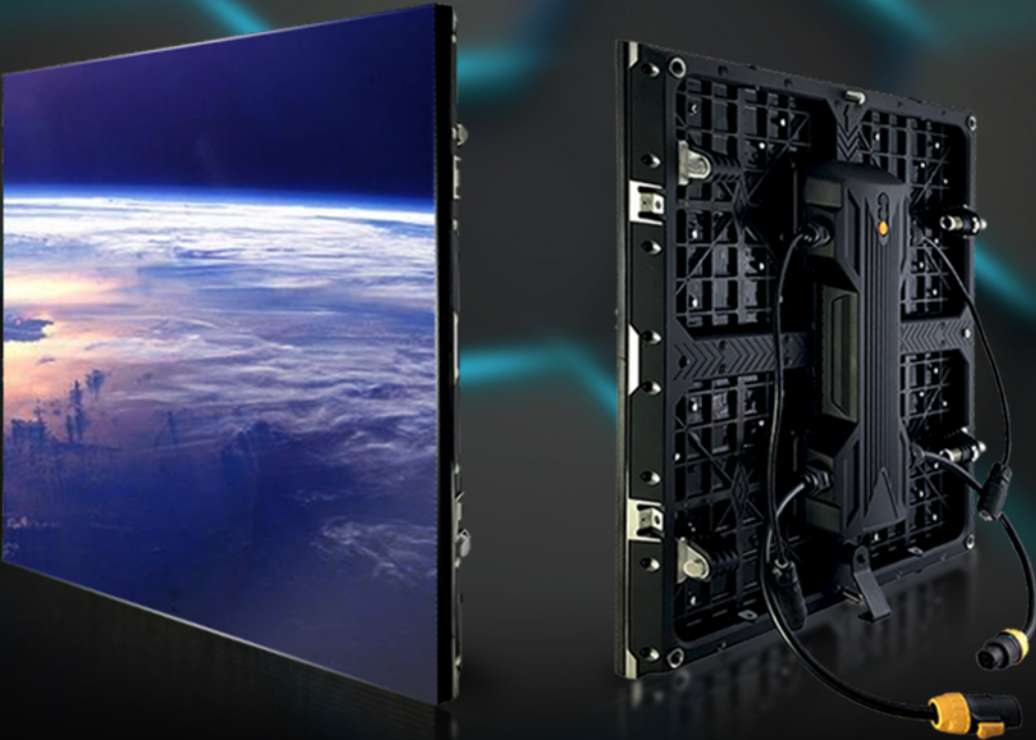

Part number	KB3	KB4	KB5	KB7
Pixel pitch	3.9mm	4.8mm	5.9mm	7.8mm
Size of module	250mmx250mm	250mmx250mm	250mmx250mm	250mmx250mm
Resolution of module	64x64	52x52	42x42	32x32
Density	65536 dots/m <sup>2</sup>	43264 dots/m <sup>2</sup>	28224 dots/m <sup>2</sup>	16384 dots/m <sup>2</sup>
Cabinet material	Alu	Alu	Alu	Alu
Size of cabinet	500mmx500mm	500mmx500mm	500mmx500mm	500mmx500mm
Weight of cabinet	6 kg	6 kg	6 kg	6 kg
Support front maintenance or not	Yes	Yes	Yes	Yes
Support curve or not	Yes	Yes	Yes	Yes
Max power consumption	850W/m <sup>2</sup>	850W/m <sup>2</sup>	850W/m <sup>2</sup>	850W/m <sup>2</sup>
Average power consumption	283W/m <sup>2</sup>	283W/m <sup>2</sup>	283W/m <sup>2</sup>	283W/m <sup>2</sup>
Colors	16.7M	16.7M	16.7M	16.7M
Gray scale	14Bits	14Bits	14Bits	14Bits
Driving method	1/8 scanning	1/9 scanning	1/7 scanning	1/4 scanning
Refresh frequency	3000Hz	3000Hz	3000Hz	3000Hz
Brightness	4000cd/m <sup>2</sup>	6000cd/m <sup>2</sup>	6000cd/m <sup>2</sup>	6000cd/m <sup>2</sup>
IP grade	IP65(IP67 is available)	IP65(IP67 is available)	IP65(IP67 is available)	IP65(IP67 is available)