



LIGHTKING

KING SHOW

576x576



[www.lightking-led.com](http://www.lightking-led.com)

# RENTALS

INDOOR

3.8mm, 4.8mm, 6mm

OUTDOOR

4.8mm, 6mm

RS(pro) series

Outdoor



RS series

Indoor



01

## Super light

Cabinet size:576mmx576mm




(indoor)  
7KG each panel




(outdoor)  
7.8KG each panel

## Individualized design

02




1



2



3

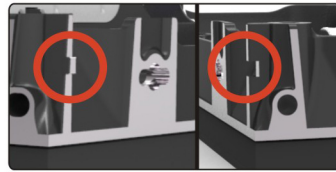

4

1, Die-casting aluminum cabinet and flywheel fast lock design, easy to set up and dismantle.


2, Herringbone shape mechanics structure, high rigidity and decrease the weight.

3, Magnet module design, module can be taken out from the back, easy to maintain.

4, Chamfer on each side of panel to guarantee the flatness.

03

## Product Diagram(mm)

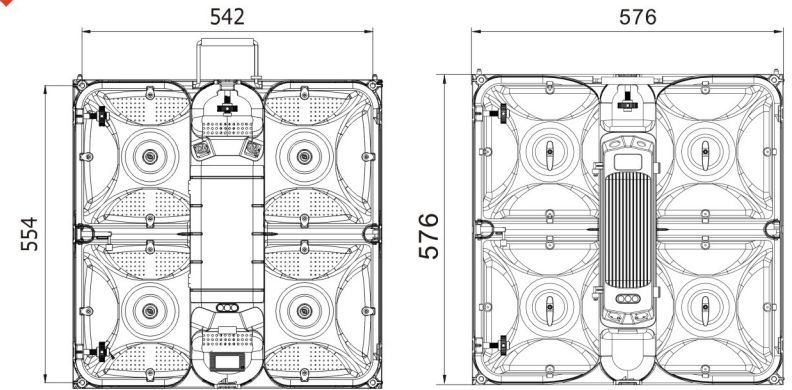

(indoor)

(outdoor)

04

## Specifications

### Part Number

### RS3/4/6

### RS(pro)4/6

Pixel pitch	3.8mm/4.8mm/6mm	4.8mm/6mm
Size of module	288mmx288mm	288mmx288mm
Resolution of module	75x75/60x60/48x48	60x60/48x48
Size of cabinet	576mmx576mmx94mm	576mmx576mmx96mm
Support hanging or not	Yes	Yes
Max power consumption	550W/m <sup>2</sup>	710W/m <sup>2</sup>
Average power consumption	180W/m <sup>2</sup>	237W/m <sup>2</sup>
Colors	16.7M	16.7M
Gray scale	16Bits	16Bits
Driving method	1/15, 1/15, 1/12 scanning	1/10, 1/8 scanning
Refresh frequency	2400Hz	≥1920Hz
Control method	Synchronization	Synchronization
Driving device	Constant current	Constant current
Brightness	800-900 cd/m <sup>2</sup>	≥5000cd/m <sup>2</sup>
IP grade	IP30	IP65